


Product Brief

# SynQuacer SC2A11

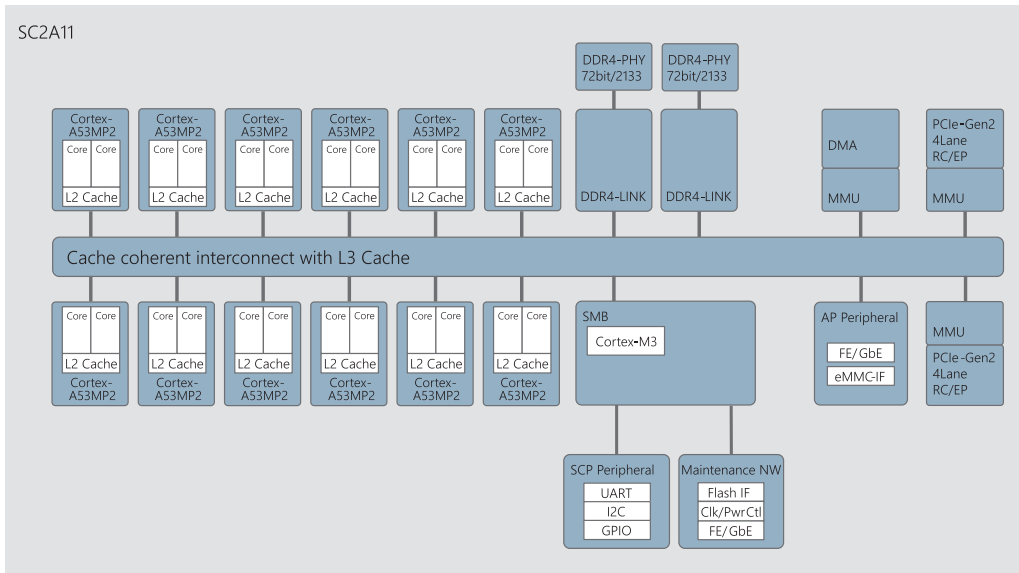

- BGA 30 x 30 mm<sup>2</sup>
- Also available as IP block for ASIC

## Overview

- Multi-core CPU chip 24 64-bit ARM® Cortex®-A53
- Scalable (Up to 1536 parallel cores using 64 SC2A11s)
- Security features included (OPAL, Ethernet Processor)
- Highly power efficient (5W typical @ 24°C)

## Features

Processor(s)	24 x Cortex®-A53 MPCore, 1 GHz
Cache	L1 I/D=32KB/32KB, L2=256KB, L3=4MB
Memory I/F	DDR4-2133Mbps 64-bit + ECC
PCIe	PCI Express Gen2, Root/Endpoint select, 4 lanes (2 systems/for SoC IF)
LAN	2ch 1Gbps with IPSec Network Offload Engine (wire-speed)
Flash I/F	HSSPI, eMMC
Flash I/F	UART, I2C, GPIO

## Applications

- Servers
- Industrial
- Edge computing



Evaluation Board

The Products and product specifications described in this document are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements. All company names, brand names and trademarks herein are property of their respective owners.

## Socionext America Inc.

1455 McCarthy Blvd.  
 Milpitas, CA 95035  
 Main Office +1-844-868-1795  
[www.socionextus.com](http://www.socionextus.com)